



PRODUCT OVERVIEW

PRESSURE MEASUREMENT

MAC Sensor Co.,LTD.

Changsha City,Hunan,China

<http://www.macsensor.com>

TEL: +86-731-89975636 / 89975645

MAC Sensor Co.,LTD.

PF200 Intrinsically Safe Explosion-proof Pressure Transmitter



Characteristics

- ☆ High accuracy up to 0.2%F.S
- ☆ Sputtered film ensures long-term stability $\geq \pm 0.2\%FS/year$
- ☆ No oil filling, not causing thermal instability or leaks
- ☆ Wide selection range, from 0.5MPa to 250MPa
- ☆ Reverse polarity protection
- ☆ Accuracy guaranteed within the temperature $-40^{\circ}C$ to $105^{\circ}C$
- ☆ All welded stainless steel construction, no glue, less creep
- ☆ IP65, IP67 degree of protection

Applications

- ☆ Ships
- ☆ Refining
- ☆ Oil drilling
- ☆ Chemical industry
- ☆ Gas network
- ☆ Oil pipeline
- ☆ Coal
- ☆ Inflammable and explosive industry

Profiles

PF200 intrinsically safe explosion-proof pressure transmitter is packaged with a metal-based pressure-sensitive chip. The wetted parts are made of 17-4PH stainless steel material. We provide a variety of electrical and pressure connections. The manufacturing process adopts the most advanced automation equipment and ensure consistent sensor quality and performance.


The pressure sensor adopts an all-welded stainless steel compact design, which can effectively protect the sensor under harsh working conditions. Its solid internal structure design ensures that the sensor can work normally in a high-vibration environment.

PF200 features strong long-term fatigue resistance, wide temperature range, and shock-resistance and high reliability. It can perform accurate measurement even under the harshest conditions, and is suitable for pressure measurement of various gases and liquids. The pressure transmitter is compact and ideal for tight space installation applications in hazardous areas.

Specifications

Parameter	PF200									
Measuring range(MPa)	0.5-2.5	4-10	16-40	60	70	100	120-180	200	250	
Overload pressure	200%	200%			150% and $\leq 300\text{MPa}$					
Burst pressure	2000%	2000%	1000%	$\leq 400\text{MPa}$	$\leq 400\text{MPa}$					
Accuracy	$\pm 0.2\% \text{F.S.}, \pm 0.5\% \text{F.S.}, \pm 1\% \text{F.S.}$									
Long-term stability	$\pm 0.2\% \text{F.S./year}$									
Output	0.5-4.5V non-ratiometric 0.5-4.5V ratiometric									
Power Supply	24VDC									
Zero point temperature drift	$\pm 0.1\% \text{F.S./}10^\circ\text{C}$									
Full range temperature drift	$\pm 0.3\% \text{F.S./}10^\circ\text{C}$									
Load	Voltage output: $R_L \geq 2\text{K}\Omega$									
Response time	$\leq 1\text{ms}$									
Durability	10^7 pressure circles									
Insulation resistance	$\geq 1000\text{M}\Omega/500\text{VDC}$									
Sensitive component material	17-4PH									
IP rating	IP65, IP67									
Explosion-proof grade	Ex ia IIC T6 Ga									
Medium temperature range	$-40\sim +105^\circ\text{C}$									
Ambient temperature range	$-40\sim +105^\circ\text{C}$									
Storage temperature range	$-40\sim +105^\circ\text{C}$									
Random vibration	20g, GB/T2423.56-2006									
Sinusoidal vibration	14.1g, GB/T2423.10-2008									
Shock	50g, 11ms, GB/T2423.5-1995									
EMC-electromagnetic field radiation immunity	GB/T 17626.3-2016									
EMC-electrostatic discharge immunity	GB/T 17626.2-2018									

Wiring

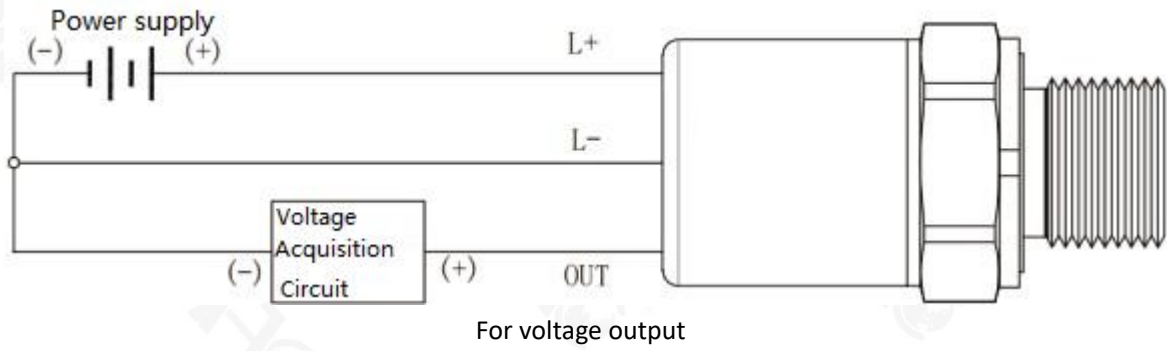

Pressure Connections

Code	G2	M3	G1	G5
Overall dimensions	<p>G1/4-19</p>	<p>M12x1.5</p>	<p>G1/8</p>	<p>G1/4-19A</p>
Code	M1	G4	M4	
Overall dimensions	<p>M8X1.25 female</p>	<p>G1/2</p>	<p>M14X1.5</p>	

Electrical Connections

Code	01	02
Port form	<p>M12X1</p>	<p>Direct cable outlet</p>
Pin definition	<p>Voltage</p> <p>1:Power +</p> <p>2:Signal</p> <p>3:GND</p> <p>4:/</p>	<p>Voltage</p> <p>Red:Power</p> <p>Black:GND</p> <p>Blue: Signal +</p>

Order Information

Item	PF200 (Model)	01	B	S3	G2	055	1
Electrical Connection		01=M12X1 02=Direct cable outlet					
Output		B=0.5-4.5V non-ratiometric C=0.5-4.5V ratiometric					
Power Supply		S3=24Vdc					
Pressure connection		G2=G1/4-19 G1=G1/8 G4=G1/2 M1=M8X1.25 female	M3=M12X1.5 G5=G1/4-19A M4=M14X1.5				
Pressure Measurement		055=0.5 MPa 255=2.5 MPa 106=10 MPa 406=40 MPa 107=100 MPa 167=160 MPa 257=250 MPa	105=1 MPa 046=4 MPa 166=16 MPa 606=60 MPa 127=120 MPa 187=180 MPa	165=1.6 MPa 066=6 MPa 256=25 MPa 706=70 MPa 147=140 MPa 207=200 MPa			
Accuracy		0=1%F.S	1=0.5%F.S	7=0.2%F.S			